CLEANER'S SINK

#CS / CLEANER'S SINK



- Grade 304 S.S. satin finish tub
 - Grade 304 S.S. hinged bucket grate
 - Large 46L bowl capacity
 - Adjustable support legs optional
- - 50mm waste & wall brackets supplied
 - Suits cleaner's rooms
 - Optional 600mm high splashback



features

and

benefits

The *BRITEX Stainless Steel Cleaner's Sink* consists of an extra large grade 304 stainless steel 46 litre tub and a robust stainless steel hinged grate for support and storage of buckets. This is an extremely sturdy, heavy duty product designed to handle significant wear and tear. Available with wall brackets (Model CSB), or with wall brackets and adjustable front legs (Model CSL). Additional splashback (up to 900mm high) optional.



BRITEX Cleaner's Sink - 600x500x250mm Deep. 46L Bowl Capacity. Supplied with stainless steel bucket grate, wall brackets, front legs and 50mm waste outlet - Product Code CSX

*RED TEXT may denote a variable where one option only is to be selected, a nominal dimension that needs to be specified, or an optional feature that can be removed if not required. Please refer to the back of this page for additional specification details and options.

VISIT BRITEX.COM.AU TO DOWNLOAD BIM FILES, CAD DRAWINGS AND THE MOST CURRENT PRODUCT LITERATURE.



MELBOURNE Britex Place, Mirra Crt Bundoora VIC 3083 t (03) 9466 9000 f (03) 9466 9044 **SYDNEY** 16 Northumberland Drv Taren Point NSW 2229 t (02) 9531 2100 f (02) 9531 2800

 Y
 PERTH

 vrv
 Unit 1/8 Principal Link

 29
 Malaga WA 6090

 00
 t (08) 9249 5464

 00
 f (08) 9248 6893

BRISBANE 19 Manilla St East Brisbane QLD 4169 t (07) 3363 2440 f (07) 3363 2444


ADELAIDE The Britex Group SA State Office t 1300 764 744 f 1300 784 306

britex.com.au | info@britex.com.au | A.B.N 83 004 309 737

CLEANER'S SINK

PRODUCT CODE



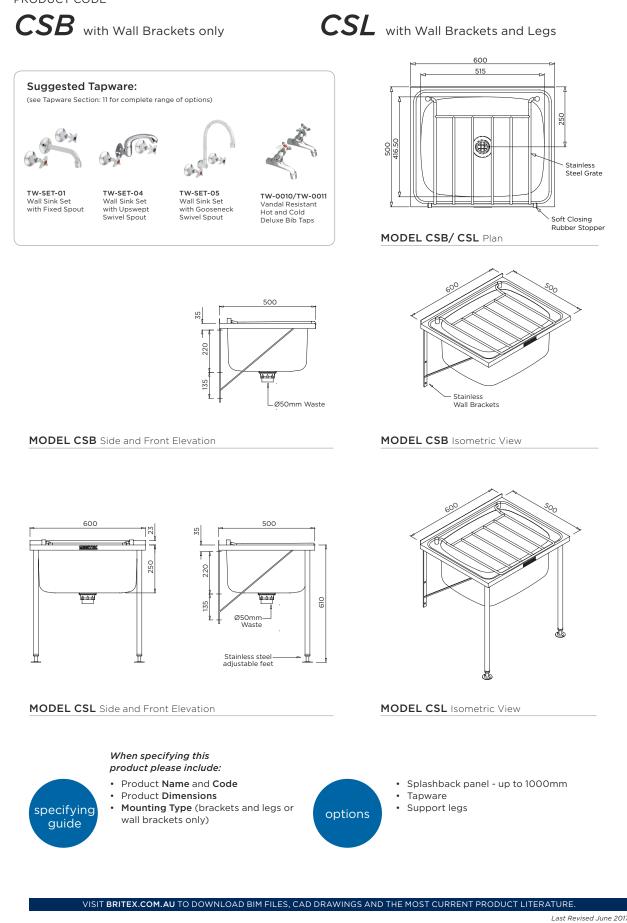



Due to ongoing research and our commitment to product development, details are subject to change without notice. Details accurate at time of print. Please refer to britex.com.au for the most current product information. Allow +/- 5mm tolerance for dimensions and setouts shown in product literature.

